


# Instruction Manual of Pill Reminding Clock - TT4-0SQ

## Features

- Displays current time - hour and minute
- Power Saving Alert (PSA), reminder repeats three times every minute until "CONFIRM" key is pressed.
- Up to four reminders a day
- Two methods of reminder alert – audible or visual
- Clip with a hanging hole, and a hidden magnet on the backside – can stand on desk, be mounted on wall, clipped anywhere, and attached on refrigerator or any iron surface
- Use 2 pcs of UM4 (AAA) battery





## Keys

1. **MODE/CONFIRM** – Used to enter each reminder mode, to return to real time, to confirm dose is taken or job is done, and to stop the reminder alert
2. **SET** – To enter programming mode of real time or each reminder alarm time
3. **UP** – To adjust the real time, and each alarm time, or to enable and disable each reminder

## How to Select Reminding Method – Audible or Visual

Refer to Fig. b, use switch on the backside to select audible or visual alert.

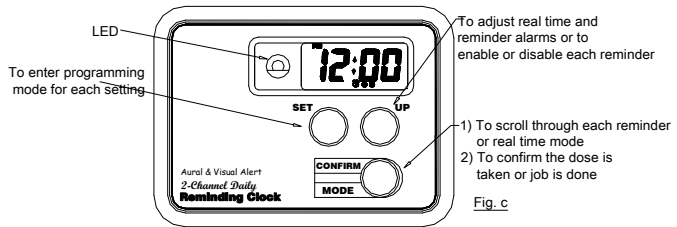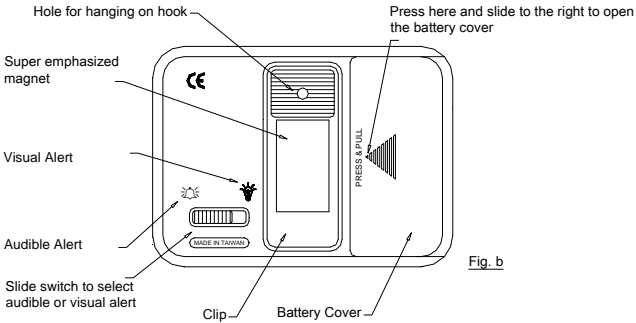

## How to Install Battery

Remove battery cover as shown in Fig b. Install two pcs of UM4 (AAA) battery in proper position as indicated. The LCD screen is displayed fully for 3 seconds, then returns to real time mode. At the same time the reminding alert, (audible or visual depends on what method you choose) is activated for 3 seconds.

## How to Set Real Time

1. At real time mode press "SET" key to set the hour, the reading of "hour" starts to flash. Use "UP" key to adjust the hour.
2. Press "SET" key again to set the minute, the reading of minute starts to flash. Use "UP" to adjust the minute.
3. Press "MODE" again to finish time setting and return to real time.

## How to Set Reminder Time(s)

At real time mode, press the 'MODE' button once to scroll to the 1<sup>st</sup> Reminder Alarm setting. The Reminder Mode symbol displays solid with 1<sup>st</sup> reminder symbol flashing, indicating it is not yet enabled, as shown in Fig a.. To adjust the reminder time, use the same method you used when you set the real time, as in the above paragraph. Once set, make sure the "Hour" and "Minute" reading are displayed solid, indicating it is enabled. If the 1<sup>st</sup> reminder symbol is flashing (refer Fig. a). This means the 1<sup>st</sup> reminder is not yet enabled. Press "UP" to enable it. Then the symbol becomes solid. If "UP" is pressed again, the reminder is disabled and the symbol starts to flash again. Repeat pressing "MODE" to scroll to the 2<sup>nd</sup>, 3<sup>rd</sup>, or 4<sup>th</sup> reminder, and apply the same method to set each reminder.

## How to Know the Reminder is Turned On

At real time, if the reminder symbol appears for a certain reminder, as shown in Fig a., then that reminder is turned on. If the symbol does not appear for a certain reminder, then that reminder is turned off.

## How to Enable or Disable Each Reminder

At real time mode, repeatedly press "MODE" to scroll to the reminder, which you are going to enable. If the reminder symbol is flashing then it is not enabled. Press "UP" to enable it. The related symbol should become solid. Then repeatedly press "MODE" to return to real time, or wait for 10 seconds and the display will return to real time automatically.

## How to Confirm the Reminding Alert

The symbols of all enabled reminders should display solid at real time mode. When a certain reminder time arrives, its related symbol starts to flash and reminding alert goes off for three times every minute. You should press the "CONFIRM" key to confirm dose is taken or job is done, as indicated on Fig. c. Otherwise, the reminding alert will never stop. After "CONFIRM" key is pressed the flashing symbol changes to solid. It will repeat again the next day at the same time. Be sure to use the same method to confirm the reminder and stop the alert. If your need for a reminder becomes unnecessary, then follow the instruction above to disable the reminder.